

Standard Operating Procedure

## **Methods for Assessing Habitat in Wadeable Streams**

Commonwealth of Kentucky  
Energy and Environment Cabinet  
Department for Environmental Protection  
Division of Water

Version 3.1

Effective Date: March 2025  
Original Effective Date: March 1, 2011

Document ID: DOWSOP03024

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 2 of 33

## DOCUMENT REVISION HISTORY

Version and Effective Date	Page(s) Revised	Revision Explanation	Version Author and Reviewers
1.0 January 31, 2011	All	New Document	Aric Payne (Author); Bryan Marbert, Lara Panayotoff, John Brumley (Reviewers)
2.0 February 2022	All	Updated to current SOP template format (added Summary of Method and Data & Records Management sections). Re-arranged elements to match current datasheet. Corrected error in Index Period. Added details on several datasheet elements: updated Figure 1, added descriptions and definitions for most elements of 8.2, added bedrock to substrate in 2a, add Figure 2 to element 5; updated Table 2 format; added 8.4 photo documentation. Minor updates to both datasheets.	Mary Rockey
3.0 January 2025	Pg. 8	Updated High vs. Low Gradient streams section 8.1.2 to include updated methods for determining a station's bioregion. Updated Figure 1 to include newly defined transition areas. Updated Bioregions section 8.2.1 to include new criteria for determining secondary bioregions. Clarified language about recording scarce riffle habitat in high-gradient streams.	Jessica Schuster
3.1 March 2025	Appendix A & B	Update HG and LG Datasheets – changes to Multihabitat Sampled.	Jessica Schuster

**Suggested Citation:** Kentucky Division of Water (DOW). 2025. Methods for Assessing Habitat in Wadeable Streams. Kentucky Department for Environmental Protection, Division of Water, Frankfort, Kentucky.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 3 of 33

## TABLE OF CONTENTS

---

1.0 SCOPE & APPLICABILITY .....	4
2.0 SUMMARY OF METHOD.....	4
3.0 DEFINITIONS & ACRONYMS .....	4
4.0 HEALTH & SAFETY STATEMENT .....	5
5.0 CAUTIONS & INTERFERENCES .....	5
6.0 PERSONNEL QUALIFICATIONS.....	6
7.0 EQUIPMENT & SUPPLIES.....	6
8.0 STEP-BY-STEP PROCEDURE .....	6
8.1 Sampling Considerations.....	6
8.1.1 Index Period.....	6
8.1.2 High vs. Low Gradient Streams .....	7
8.2 Filling out a Habitat Assessment Datasheet .....	9
8.2.1 Station Visit Information .....	9
8.2.2 Station Point Verification .....	10
8.2.3 Weather.....	11
8.2.4 Stream Shading.....	11
8.2.5 Stream Flow.....	11
8.2.6 Instream Features .....	12
8.2.7 Riffle/Run/Pool or Run/Pool Sequence.....	12
8.2.8 Local Watershed Features.....	13
8.2.9 Current Channel Alterations.....	13
8.2.10 Riparian Vegetation.....	13
8.2.11 Hydraulic Structures.....	13
8.2.12 Field Meter Data.....	13
8.2.13 Field Activities .....	14
8.2.14 Substrate Characterization.....	14
8.2.15 Reach Location Description .....	14
8.2.16 Assessment Procedures .....	15
8.2.17 General and Sediment Notes .....	25
8.3 Habitat Rating Development.....	25
8.4 Photo documentation .....	26
9.0 DATA & RECORDS MANAGEMENT.....	27
10.0 QUALITY CONTROL & QUALITY ASSURANCE .....	27
11.0 REFERENCES.....	28
Appendix A. High Gradient Habitat Assessment Datasheet.....	30
Appendix B. Low Gradient Habitat Assessment Datasheet. <b>Error! Bookmark not defined.</b>	

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 4 of 33

## 1.0 SCOPE & APPLICABILITY

---

This manual has been developed by the Kentucky Division of Water (DOW) as guidance for the uniform and accurate evaluation of habitat parameters present in wadeable streams of Kentucky. The methods defined herein are required for all habitat assessment procedures and quality assurance (QA)/quality control (QC) activities resulting in information that could be used for water quality assessments.

## 2.0 SUMMARY OF METHOD

---

Habitat condition is critical to understanding and assessing stream health. This procedure outlines the methods used by DOW to evaluate the habitat available for aquatic life within Kentucky's wadeable streams and the riparian habitat surrounding those streams. The procedure described herein is based on the historical methods used by the Water Quality Branch (WQB) (DOW 2008), as well as general methods recommended in the manual *Rapid Bioassessment Protocols for Use in Streams and Wadeable Rivers* (Barbour et al. 1999). The procedure is commonly referred to as the RBP method.

## 3.0 DEFINITIONS & ACRONYMS

---

**DOW** – Kentucky Division of Water

**GNIS** – Geographic Names Information System

**K-WADE** – Kentucky Water Assessment Data for Environmental Monitoring

**QA** – Quality Assurance

**QC** – Quality Control

**RBP** – Rapid Bioassessment Protocols

**SOP** – Standard Operating Procedure

**WQB** – Water Quality Branch

### Bioregions of Kentucky:

**BG** – Bluegrass Bioregion

**MT** – Mountain Bioregion

**MVIR** – Mississippi Valley-Interior River Bioregion

**PR** – Pennyroyal Bioregion

**Pool** – An area of a stream characterized by deep (usually > 0.5 m), slow velocity and a variety of substrate types. Because of slower velocities, sediment deposition can occur over pool substrate. Pools may have a higher diversity of permanent microhabitat types.

**Riffle** – An area of a stream with an observable decrease in gradient characterized by shallow (<0.5 m), fast velocity and stable, layered rock substrate. The surfaces of some substrate may be exposed above the waterline.

**Run** – An area of a stream characterized by deep (usually > 0.5 m), fast velocity and a variety of substrate types. Runs are commonly found below riffles. In low gradient streams, runs (also called glides) are the dominant habitat where velocity is faster than the surrounding habitats.

**Thalweg** – The deepest part of a stream channel, whether underwater or not.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 5 of 33

## 4.0 HEALTH & SAFETY STATEMENT

---

All field staff should review and follow *Worksite Hazard Assessment Guidance Document* (DOW, 2025). In addition, each employee will be individually trained by their supervisor, or designee, to perform assigned job tasks safely, prior to performing the task.

Field staff working in and around potentially contaminated surface waters should receive immunization for Hepatitis A (KDEP Policy SSE-708), Hepatitis B, and tetanus to aid in the prevention of contracting those pathogens. All field staff should also be trained in CPR, First Aid, and Bloodborne Pathogens (KDEP Policy SSE 711; 29 CFR 1910.151 and 29 CFR 1910.1030). Pertinent field staff allergies, such as bee stings, shall be identified before the sampling trip. Members of a field crew should familiarize themselves with the nearest hospital, doctor's office, or urgent medical care provider prior to leaving for site visit.

Personal protective equipment (PPE) should be used when sampling. This includes but is not limited to site-appropriate wading boots, personal flotation device, and weather appropriate clothing.

## 5.0 CAUTIONS & INTERFERENCES

---

Habitat assessment should be performed during base flow conditions and in the appropriate index period (see Section 8.1). If very low/no flow, high flow, or flooding conditions are present, data collection should be postponed. If a scouring rain event has occurred in the last 14 days, data collection may need to be postponed, depending on project objectives (scouring event is defined in Section 8.2.3). When habitat assessments are conducted in conjunction with biological sample collection (e.g. fish, macroinvertebrates, or algae) it is typical to postpone the full data collection event to allow for re-colonization of the target fauna. If habitat assessments are performed independently, postponement may still be appropriate if riparian or instream habitat has been significantly altered from its typical conditions and is no longer considered representative.

Data sheets are specific to stream gradient. The appropriate data sheet must be used to evaluate high versus low gradient streams. Stream gradient categories are defined in Section 8.1.2.

Failure to collect data during the appropriate season, under the appropriate conditions, and using the appropriate method may invalidate the data and make it unusable for biological assessment. If a potential monitoring reach has backwater from a lake, dam, or large river, this reach should not be used for biological or habitat assessment. The investigators are responsible for the quality and integrity of the data. Data must be accurate so that valid assessments can be made later. At least two trained biologists should perform a collaborative habitat assessment to reduce individual bias.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 6 of 33

## 6.0 PERSONNEL QUALIFICATIONS

---

All personnel involved in habitat assessment will meet at least the minimum qualifications for their job classification. Field biologists must have basic knowledge of aquatic organisms and their habitats. In addition, biologists must have knowledge of stream geomorphology and stream physical processes. All field biologists will receive formal training in this procedure and training will continue on-the-job through interaction with experienced field personnel.

## 7.0 EQUIPMENT & SUPPLIES

---

The following list of supplies are needed to complete this habitat assessment.

- High or Low Gradient Stream Datasheet (Appendices A and B)
- Waterproof pen, permanent marker, or pencil
- Range finder and/or measuring tape and flagging
- GPS unit

## 8.0 STEP-BY-STEP PROCEDURE

---

A habitat assessment should be conducted at every sampling reach where bioassessments are conducted. Such assessments will allow investigators to evaluate the quality of instream and riparian habitat, and the availability of quality habitat directly influences the biological integrity of the stream reach. Information obtained from the habitat assessment can be used to supplement biological and physicochemical data when determining the overall health of the stream reach and designated use attainment for 305(b) reporting.

Additionally, habitat assessments can be used to document physical changes that occur at a sampling reach over time. Habitat assessments provide continuity and consistency between all entities involved in multi-agency monitoring efforts. Habitat assessment procedures described herein follow those outlined in *Rapid Bioassessment Protocols for Use in Streams and Wadeable Rivers* (Barbour et al. 1999).

### **8.1 Sampling Considerations**

Before sampling begins, the appropriate index period and method must be determined. Also, habitat should not be assessed during periods of excessively high or low flows or within two weeks of a known scouring flow event (see Section 8.2.3).

#### **8.1.1 Index Period**

Habitat assessment within the designated index periods is critical for accurate evaluation of wadeable streams. Index periods for streams, based on their drainage area, are:

- Headwater streams (<5mi<sup>2</sup> drainage area) – March 1<sup>st</sup> to May 31<sup>st</sup>
- Wadeable streams (>5mi<sup>2</sup> drainage area) – May 1<sup>st</sup> to September 30<sup>th</sup>

In some cases, assessment outside these index periods is permissible to determine immediate impacts (e.g. chemical spills, leaks, etc.). For routine assessments or baseline data collection, data collected outside of these index periods are considered unacceptable.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 7 of 33

### 8.1.2 High vs. Low Gradient Streams

Streams in Kentucky are characterized as high gradient or low gradient streams. This stream classification is based on flow and presence or absence of particular types of habitat. The metrics assessed for each gradient type differ and are reflected on separate datasheets (Appendices A and B). A determination of the stream reach gradient must be made prior to performing a habitat assessment. The following guidelines should be used when determining stream gradient.

#### *High gradient*

High gradient streams are defined as streams that have velocities greater than 0.013m/sec (0.5ft/sec), exhibit rapid changes in stream gradient, and have a high frequency of riffle habitat. These streams are found in the Mountain (MT), Bluegrass (BG), and Pennyroyal (PR) Bioregions of Kentucky and any transition areas between those bioregions (Figure 1).

If a high gradient stream has minimal or completely lacks natural riffle habitat and falls within a high gradient bioregion, biologists are to complete a High Gradient Habitat Assessment Datasheet and provide comments as to why riffle habitat was lacking (e.g. reach dominated by bedrock). If biological sampling occurs, additional notes should be taken describing the habitat that was sampled in lieu of true riffles (e.g. shallow, fast-moving glide with obvious change in slope). Parameter 7a should be scored to reflect the absence of true riffles when a stream reach completely lacks natural riffle habitat. Non-riffle habitat that is targeted for biological sampling should not be substituted as true riffle habitat when determining a score for Parameter 7a.

#### *Low gradient*


Low gradient streams are defined as streams that have velocities less than 0.013m/sec (0.5ft/sec) and naturally lack riffle habitat. These streams are found in the Mississippi Valley-Interior River (MVIR) Bioregion (Figure 1). The Low Gradient Habitat Assessment Datasheet must be used in streams that fall completely within the MVIR.

Streams lying within the transition area between the PR and MVIR bioregions may be difficult to classify as high gradient or low gradient (Figure 1, Inset 2). Assessors should use best professional judgment and the following guidelines to determine gradient within the PR/MVIR transition area:

- If stream gradient is not obvious, assessors should walk the sampling reach, make notes, and take photographs of shallow, fast areas of the stream and determine if these macrohabitats are composed of stable riffles with prominent cobble and/or boulder substrate (which would indicate high gradient).

Historical sampling information may also provide assistance in making gradient determinations. If a station has been classified as high or low gradient in the past, the classification should carry forward in future assessments.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 8 of 33

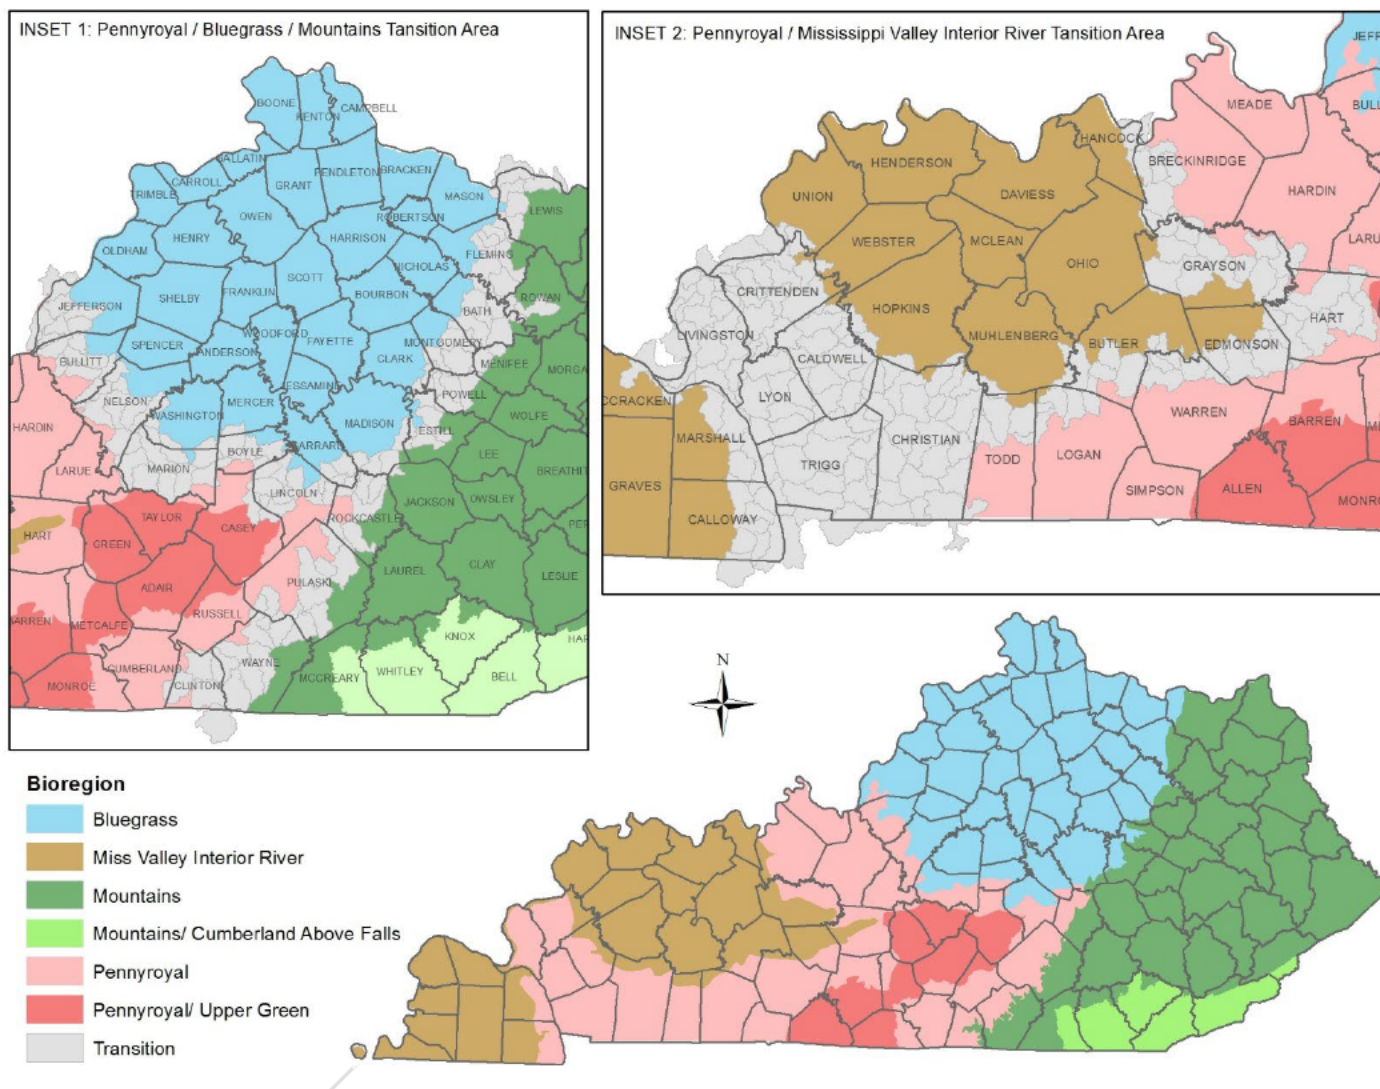

**Figure 1. Bioregions of Kentucky and the transition areas between the bioregions. Pennyroyal/Bluegrass/Mountains Transition Areas** require consideration of a secondary bioregion in station documentation (see Inset 1 and Section 8.2.1 Bioregion). **Pennyroyal/Mississippi Valley Interior River Transition Areas** require consideration of data collection methods (see Inset 2 and Section 8.1.2 High vs. Low Gradient Streams) and consideration of a secondary bioregion in station documentation (see Section 8.2.1 Bioregion).



Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 9 of 33

## **8.2 Filling out a Habitat Assessment Datasheet**

The following sections explain how to complete each individual portion of the habitat assessment datasheet in high gradient and low gradient streams. If any of the observations on this sheet are insufficient to capture conditions at the station, provide additional descriptive notes and photos to supplement the data.

### **8.2.1 Station Visit Information**

The header information is identical on all sheets and requires sufficient information to identify the timing and location of data collection. The K-WADE (Kentucky Water Assessment Data for Environmental Monitoring) database should be referenced to provide station identification, locale, location description, and project/trip name. The following information should be filled out completely:

- Station Identification
- Locale (GNIS stream name)
- Location Description
- County
- Date and time (start and finish) of assessment (time in 24-hour format)
- Name(s) of the investigator(s) (include designated Activity Lead and all Field Technicians)
- Project and Trip associated with the sampling event

Additional details such as primary and secondary bioregion (if applicable; see Figure 1 and *Bioregion* subsection below), stream permanence (ephemeral, intermittent, and perennial; see *Stream Permanence* subsection below), and stream type (headwater or wadeable; see section 8.1.1) are also found in this section.

#### *Stream Permanence*

Note if the stream is perennial, ephemeral, or intermittent. Biological communities inhabiting ephemeral or intermittent streams are markedly different from communities in perennial streams due to unstable water flows. Those communities present in ephemeral and intermittent streams may consist of more tolerant organisms. The following definitions apply to these terms:

- **Ephemeral Stream** – has flowing water only during, and for a short duration after, precipitation events in a typical year.
- **Intermittent Stream** – has flowing water during certain times of the year, when groundwater provides water for stream flow. During dry periods, intermittent streams may not have flowing water.
- **Perennial Stream** – has flowing water year-round during a typical year.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 10 of 33

## Bioregion

The biological communities found in the Commonwealth's four bioregions are distinct and varied. A station should be assigned to at least one primary bioregion using the methodology outlined in the *K-WADE Station Creation SOP* (DOW 2024). For all stations within the bounds of the transition area (Figure 1), the K-WADE station should have both a primary and secondary bioregion assigned. The primary bioregion is the bioregion in which the station is located according to the latitude and longitude coordinates. When a station is located within the bounds of a transition area, the neighboring bioregion is considered the secondary bioregion. If needed, a GIS layer of bioregions and transition areas can be provided by DOW, upon request.

### 8.2.2 Station Point Verification

For first-time station visits where station locations are determined using GPS coordinates and mapping software such as ArcGIS or Google Earth, verification of the station coordinates is required. This is achieved utilizing a series of datasheet elements.

- 1) **K-WADE Target Point:** The target latitude and longitude of the station are listed on the datasheet in advance; these are the GPS coordinates derived from mapping software.
- 2) **Field GPS Location:** Field staff navigate to station with the assistance of a handheld GPS unit. Once on site, the latitude and longitude on the handheld unit are recorded as the Field GPS Location, along with details on the satellite accuracy.
  - If the listed coordinates do not get staff to the stream or area of interest (or, in rare cases, a sampling location is shifted based on criteria outlined in applicable PMPs or PSPs) staff will continue to navigate until they reach the intended area for sampling before recording the Field GPS Location.
  - **Nav. to Target Point Within GPS Error?** Check the GPS satellite error and mark if the field station location is within that error when compared to the K-WADE Target Point (expected location in the stream channel).
  - **Target on Correct Stream?** If, after navigating to the K-WADE Target Point, the wrong stream is identified and the station must be moved or not sampled, mark 'N', otherwise, mark 'Y'. If 'N', add notes to the datasheet describing the error.
  - **Field GPS Error:** Record the GPS satellite error for the Field GPS location.
- 3) **GPS Final:** Finally, the field staff determines which set of coordinates is most accurate and annotates it in the appropriate section on the datasheet (circle 'K-WADE' if coordinates from '1)' are used, and circle 'Field' if coordinates from '2)' are used).
  - **K-WADE Station Update:** If the field GPS coordinates are used to identify a sampling location, the project lead will update the K-WADE station accordingly to reflect the correct coordinates.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 11 of 33

### 8.2.3 Weather

Note the present weather conditions on the day of the survey and those immediately preceding the day of the survey. This information is important when interpreting the effects of hydrologic events on sampling efforts. Weather abbreviations are as follows:

HR = heavy rain

SR = steady rain

IS = intermittent showers

CS = clear, sunny

CO = cloudy, overcast

SSH = snow, sleet, hail

Additionally, note if there has been a scouring rain event within the last 14 days. Determination of a scouring event is based upon the biologist's best professional judgment but is typically considered if 2 inches of rain or more falls within a watershed in a 24-hour period. In addition, observations of recent high water such as signs that the stream has recently exceeded its banks, obvious removal of filamentous algae, signs of recently shifted substrate, new bank scarring, turbid waters, or a lack of macroinvertebrates on large instream rocks should be used in making this decision (see Section 5.0 for more information on the implications of this observation).

### 8.2.4 Stream Shading

An exposed stream often exhibits increased water temperatures that may be directly or indirectly limiting to some organisms and may be favorable for nuisance algal blooms and decreased dissolved oxygen. Light intensity may be limiting to some organisms and favorable to others. A partially shaded stream generally contains the highest species diversity. In wadeable streams, sufficient shade to maintain temperatures and habitats that will support indigenous organisms is generally created by a 50% to 75% tree canopy. Natural headwater streams should generally have 75% to 100% tree canopy.

Visually assess the overhead canopy cover throughout the stream reach and estimate the canopy shading as full (canopy provides fully effective shading of stream reach), partial (canopy is present and provides some shading to stream reach), or none (there is no canopy to provide effective shading of the stream reach).

Note if tree canopy is 'leafed out' by circling 'Y' for yes, or 'N' for no. The emergence of leaves occurs over a period of days and weeks and varies by species and location. Use best professional judgement to determine if the canopy is 'leafed out' by considering its functionality as a shade for the underlying stream and riparian habitat.

While not used for assessing stream shading, if shading is provided by a non-vegetative source such as a building or natural feature, and therefore the above observations do not accurately represent conditions at the station, make note of this on the datasheet.

### 8.2.5 Stream Flow

Indicating the level of stream flow (dry, pooled, low, high, seasonal normal) is important because it can influence biological communities and water quality (e.g. low or pooled flow can

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 12 of 33

increase chemical parameters in water chemistry samples). Additionally, this information can be used to verify if the data can be used in assessment (e.g. macroinvertebrate samples collected during a high flow event would not be used for assessment purposes because sampling efficiency is lowered).

#### 8.2.6 Instream Features

Instream features are measured or estimated within the sampling reach.

##### *Stream Width*

Stream width is measured as the average wetted width, estimated visually, or using a measuring device. Wetted width is the distance from the edge of the water on one side of the main channel to the edge of the water on the opposite side of the main channel. Visually estimate or measure the wetted width of a representative sample of pool, riffle, and run habitat, and average the results.

##### *Maximum Stream Depth*

Maximum stream depth is measured as the vertical distance from water surface to stream bottom at its maximum or deepest spot within the sampling reach. Maximum stream depth should be measured with some type of measuring device (i.e. carpenters' rule or marked net handle) when possible. If a measuring device is not available, maximum stream depth can be estimated.

##### *Sampling Reach Length*

When conducting habitat assessments in conjunction with biological sampling, establish the reach length according to biological methods and project objectives before sample collection begins. The habitat assessment reach should coincide with the established biological reach length. When assessing habitat without collecting biological samples, visual observations must be conducted along 100 meters of stream to adequately assess habitat integrity. Unique habitat features may warrant extending the habitat assessment reach beyond 100 meters, but it should not be extended beyond 300 meters in length. If for some reason a sampling reach is not between 100 and 300 meters in length, the reasons for this excursion should be documented on the field assessment form. Reach length may be visually estimated or measured using a range finder or other measurement device.

#### 8.2.7 Riffle/Run/Pool or Run/Pool Sequence

The riffle/run/pool sequence is measured as the number of each macrohabitat type present within the reach. If a sample reach lacks true riffles, 'riffle' should be recorded as "0". Non-riffle habitat that is targeted for biological sampling should not be considered when making this observation.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 13 of 33

### 8.2.8 Local Watershed Features

Document the prevalent land-use type in the watershed of the sampling station (noting any other land uses in the area, which although not predominant, may potentially affect water quality). These land uses could potentially impact biological communities and water chemistry results. Use GIS, if needed, to accurately document land use within the entire catchment area.

### 8.2.9 Current Channel Alterations

Note if any current or recent dredging or channel alterations are present (i.e. straightening of stream channel, bridge construction, artificial bank stabilization). These types of alterations often decrease instream habitat and directly influence the presence or absence of biological communities. If current or recent activities are present, include notes and photos.

### 8.2.10 Riparian Vegetation

Due to its stabilizing effects as well as its ability to influence water temperatures, a riparian zone of 18 meters or more is preferred. Indicate the dominant vegetation type (trees, shrubs, herbaceous plants, and grasses) in the riparian zone (choose more than one if appropriate). In addition, the number of canopy strata present in the riparian zone should be counted as it is an indication of riparian age and quality (e.g. overstory, understory, shrub, herbaceous layer). Dominant riparian species are noted in the provided space.

### 8.2.11 Hydraulic Structures

Note the presence of hydraulic structures such as dams, bridge abutments, fords, islands, waterfalls, and berms within or nearby the sampling reach (for dams consider any known structures in the watershed). These structures often form barriers that restrict movement of organisms, which could result in the lowering of assessment scores.

- **Dams** – a barrier constructed to hold back water and raise its level. Note the presence of dams anywhere upstream or downstream of the sampling reach that may impact the water quality of the sampling reach or the movement of aquatic organisms.
- **Abutments** – a structure built to support the end of a bridge or dam.
- **Fords** – a shallow place in a river or stream used for vehicle crossings.
- **Islands** – an area within the stream channel where dry land (including exposed substrate) is bounded on all sides by water.
- **Waterfalls** – a cascade of water falling from a height, formed with a river or stream flows over a precipice or steep incline.
- **Berms** – an artificial ridge or raised bank bordering a river.

### 8.2.12 Field Meter Data

Measure and record values for each of the water quality parameters indicated (temperature (°C), dissolved oxygen (mg/L and % saturation), pH, and specific conductance) using the appropriate calibrated water quality instrument(s) and following standard operating procedures (SOP) (DOW 2018, or current revision). Note the instrument ID and calibration information in the “Field Activities, Multi-Probe” section.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 14 of 33

If collecting discharge data, measure and record stream discharge and percent uncertainty using the *Measuring Stream Discharge SOP* (DOW 2020). Note the instrument ID and beam check information in the “Field Activities, Discharge” section.

#### 8.2.13 Field Activities

Note the types of samples collected during the station visit. Each biological community has a corresponding sampling protocol indicating how and what types of samples are to be collected. Where applicable, indicate the numbers of samples collected and if duplicate samples were collected. Indicate the lead collector(s) for each sample collection.

#### 8.2.14 Substrate Characterization

In general, variations in particle size and type are reflected in flowing bodies of water by gradation of habitat types from stream headwaters to mouth. Each longitudinal gradation in substrate type harbors a characteristic biotic community. The absence of characteristic community members in the presence of a favorable substrate type can be a useful indication of stream disturbance.

For estimates of substrate size, the pool, riffle, and run habitats are visually surveyed by each field crew member to estimate the substrate by percent particle size. Results are expressed as percent of total and determined by consensus within the field crew. Sample particle sizes are listed in Table 1 to provide a fixed concept of category size. Sizes are applicable to the intermediate dimension of the particle (i.e. a rock that is flat (e.g. 0.5 inches) but wide and long (e.g. 7 inches by 11 inches), should be classified as “cobble” based on its intermediate dimension of 7 inches). Results are recorded on the habitat assessment datasheet. In addition, the estimated percent of riffle, run, and pool habitat within the sampling reach are recorded. If one or more of these habitats is missing, it is acceptable to record 0% for estimated percent. Consequently, substrate size estimates should not be recorded for missing habitats.

**Table 1.** Substrate particle size chart

Categories	Size (mm)	Size (inches)
Silt/Clay	< 0.06 mm	< 0.002 in
Sand	0.06 – 2 mm	0.002 – 0.08 in
Gravel	2 – 64 mm	0.08 – 2.5 in
Cobble	64 – 256 mm	2.5 – 10 in
Boulders	> 256 mm	> 10 in

#### 8.2.15 Reach Location Description

A description of the reach of stream that was sampled during this station visit. Use permanent features where possible to identify the upper and lower limits of the sampling reach. If available, map tools such as GPS topographic maps or aerial view map applications can be used to better identify and describe sampling reach boundaries.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 15 of 33

#### 8.2.16 Assessment Procedures

The habitat assessment is conducted following biological and water chemistry sampling so that the entire stream reach is observed during the collection of biological samples. The habitat assessment should be conducted in collaboration by all biologists present, who deliberate and reach a consensus on how each parameter is scored.

The visual based habitat evaluation consists of ten parameters that rank instream habitat, channel morphology, bank stability, and riparian vegetation for each sampling reach. A numeric scale of 0 (lowest) to 20 (highest) is used to rank each parameter (Barbour et al. 1999). For each parameter, the investigators will determine which of the following conditions exist at the sampling reach: Optimal, Suboptimal, Marginal, or Poor. A parameter score will then be given within the condition category chosen above: Optimal (20-16), Suboptimal (15-11), Marginal (10-6) or Poor (5-0). The investigators will total all parameter ratings to obtain a final habitat ranking (Barbour et al. 1999).

## Habitat Assessment Parameters

These parameters should be evaluated within the sampling reach. All areas within the reach should be evaluated together as a composite.

### 1 Epifaunal Substrate/Available Cover (High and Low Gradient Sheets)

This metric describes the relative quantity and variety of natural structures in the stream, such as cobble, boulders, fallen trees, logs, branches, root mats, undercut banks, aquatic vegetation, etc., that provide refugia, feeding opportunities, and sites for spawning and nursery functions for aquatic macrofauna. Riffles and runs are critical for maintaining a variety and abundance of insects by offering a diversity of habitat through variety of particle size, and, in many small high gradient streams, will provide the most stable habitat. Snags and submerged logs are among the most productive habitat structure for macroinvertebrate colonization and fish refugia in low gradient streams. However, “new fall” will not yet be suitable for colonization. Assessment is a composite of the entire biological sampling reach. Areas with bedrock or sand/fines alone will not be considered stable habitat.

#### High Gradient:

Habitat	Condition Category																				
Parameter	Optimal					Suboptimal					Marginal					Poor					
SCORE	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1.Epifaunal Substrate/ Available Cover	Greater than 70% of substrate favorable for epifaunal colonization and fish cover; mix of snags, submerged logs, undercut banks, cobble or other stable habitat and at stage to allow full colonization potential (i.e., logs/snags that are <u>not</u> new fall and <u>not</u> transient).					40-70% mix of stable habitat; well-suited for full colonization potential; adequate habitat for maintenance of populations; presence of additional substrate in the form of new fall, but not yet prepared for colonization (may rate at high end of scale).					20-40% mix of stable habitat; habitat availability less than desirable; substrate frequently disturbed or removed.					Less than 20% stable habitat; lack of habitat is obvious; substrate unstable or lacking.					
Score																					

#### Low Gradient:

Habitat Parameter	Condition Category																				
SCORE	Optimal					Suboptimal					Marginal					Poor					
	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
<b>11. Epifaunal Substrate/ Available Cover</b>	Greater than 50% of substrate favorable for epifaunal colonization and fish cover; mix of snags, submerged logs, undercut banks, cobble or other stable habitat and at stage to allow full colonization potential (i.e., logs/snags that are <u>not</u> new and transient).					30-50% mix of stable habitat; well-suited for full colonization potential; adequate habitat for maintenance of populations; presence of additional substrate in the form of newfall, but not yet prepared for colonization (may rate at high end of scale).					10-30% mix of stable habitat; habitat availability less than desirable; substrate frequently disturbed or removed.					Less than 10% stable habitat; lack of habitat is obvious; substrate unstable or lacking.					
Score																					





### 3a Velocity/Depth Regime (High Gradient Sheet)

The highest scoring streams in most high gradient regions will have all the following patterns of velocity and depth: 1) slow-deep, 2) slow-shallow, 3) fast-deep, and 4) fast-shallow. The occurrence of these 4 patterns relates to the stream's ability to provide and maintain a stable aquatic environment. Investigators may have to scale deep and shallow depending upon the stream size; a general guideline is:

\*Headwater streams (<5 mi<sup>2</sup>): Deep = > 0.5 m

\*Wadeable streams (>5 mi<sup>2</sup>): Deep = >1 m

\*Fast = surface of the water broken with turbulence (>0.3 m/sec)

\*Shallow areas adjacent to the thalweg in headwater streams will be considered as slow-shallow.

#### High Gradient:

Habitat	Condition Category																				
Parameter	Optimal					Suboptimal					Marginal					Poor					
SCORE	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
3.Velocity/ Depth Regime	All four velocity/depth regimes present (slow-deep, slow-shallow, fast-deep, fast-shallow). (Slow is < 0.3 m/s, deep is > 0.5 m.)					Only 3 of the 4 regimes present (if fast-shallow is missing, score lower than if missing other regimes).					Only 2 of the 4 habitat regimes present (if fast-shallow or slow-shallow are missing, score low).					Dominated by 1 velocity/depth regime (usually slow-deep).					
Score																					

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 19 of 33

## 4 Sediment Deposition (High and Low Gradient Sheets)

This metric estimates the amount of sediment that has accumulated in pools and changes that have occurred to the stream bottom as a result of deposition. Deposition occurs from large-scale movement of sediment. This may cause formation of islands, point bars (areas of increased deposition usually at the beginning of a meander that increases in size as the channel is diverted toward the outer bank), or shoals or result in the filling of runs and pools. Sediment is often found in areas that are obstructed and areas where the stream flow decreases, such as bends. Deposition is a symptom of an unstable and continually changing environment that becomes unsuitable for many organisms.

For this parameter, determine the percent of bottom that is being affected by sediment deposition for the entire sampling reach (examine bars/shoals and pool substrates). Use this percentage to categorize the reach as optimal, suboptimal, marginal, or poor.

### High Gradient:

Habitat	Condition Category																				
Parameter	Optimal					Suboptimal					Marginal					Poor					
SCORE	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
4. Sediment Deposition	Little or no enlargement of islands or point bars and less than 5% (<20% for low gradient streams) of the bottom affected by sediment deposition.					Some new increase in bar formation, mostly from gravel, sand or fine sediment; 5-30% (20-50% for low gradient) of the bottom affected; slight deposition in pools.					Moderate deposition of new gravel, sand or fine sediment on old and new bars; 30-50% (50-80% for low gradient) of the bottom affected; sediment deposits at obstructions, constrictions, and bends; moderate deposition of pools prevalent.					Heavy deposits of fine material, increased bar development; more than 50% (80% for low gradient) of the bottom changing frequently; pools almost absent due to substantial sediment deposition.					
Score																					

### Low Gradient:

Habitat Parameter	Condition Category																				
	Optimal					Suboptimal					Marginal					Poor					
SCORE	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
4. Sediment Deposition	Little or no enlargement of islands or point bars and less than 20% of the bottom affected by sediment deposition.					Some new increase in bar formation, mostly from gravel, sand or fine sediment; 20-50% of the bottom affected; slight deposition in pools.					Moderate deposition of new gravel, sand or fine sediment on old and new bars; 50-80% of the bottom affected; sediment deposits at obstructions, constrictions, and bends; moderate deposition of pools prevalent.					Heavy deposits of fine material, increased bar development; 80% of the bottom changing frequently; pools almost absent due to substantial sediment deposition.					
Score																					

## 5 Channel Flow Status (High and Low Gradient Sheets)

This metric estimates the degree to which the channel is filled with water. The score will change with the seasons. Estimate the percentage of the channel that is wet using the low water mark of both lower banks (Figure 2). The low water mark is the line on the stream bank that represents the height of the water during normal, or base, flow conditions. The low water mark is often identifiable as a natural line impressed on the bank, an obvious shelf in the bank, and/or as a disruption of terrestrial vegetation.

When water does not cover much of the streambed, the amount of suitable substrate for aquatic organisms is limited. In high gradient streams, riffles and cobble substrate are exposed; in low gradient streams, the decrease in water level exposes logs and snags, thereby reducing the areas of good habitat. Channel flow is especially useful for interpreting biological condition under abnormal or lowered flow conditions.

### High and Low Gradient:

Habitat	Condition Category																				
Parameter	Optimal					Suboptimal					Marginal					Poor					
SCORE	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
5.Channel Flow Status	Water reaches base of both lower banks, and minimal amount of channel substrate is exposed.					Water fills >75% of the available channel; or <25% of channel substrate is exposed.					Water fills 25-75% of the available channel, and/or riffle substrates are mostly exposed.					Very little water in channel and mostly present as standing pools.					
Score																					

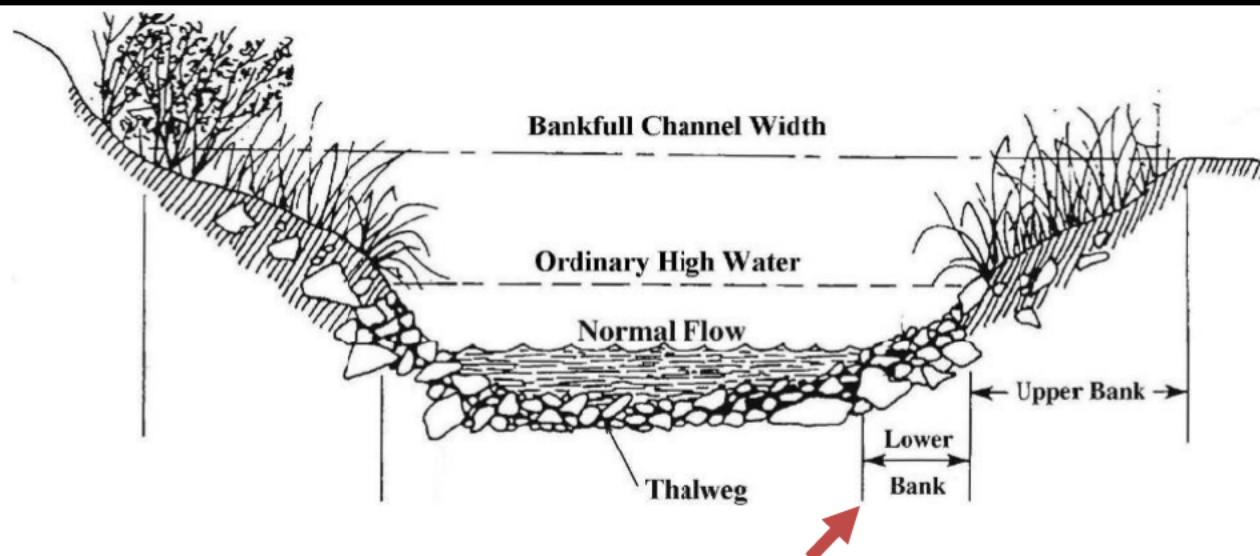


Figure 2. Typical stream cross-section indicating the low water mark of the lower bank.<sup>1</sup>

The next 5 parameters should evaluate an area from approx. 100-m upstream of the sampling reach through the sampling reach. This whole area should be evaluated as a composite. When determining left and right bank, face downstream.

<sup>1</sup> [https://gaswcc.georgia.gov/sites/gaswcc.georgia.gov/files/imported/SWCC/Files/Adam\\_White.pdf](https://gaswcc.georgia.gov/sites/gaswcc.georgia.gov/files/imported/SWCC/Files/Adam_White.pdf)









Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 24 of 33

## 9 Bank Vegetative Protection (High and Low Gradient Sheets)

This metric estimates the amount of vegetative protection afforded to the stream and the near stream portion of the riparian zone.

Each bank is scored independently from 10-0. Determine what vegetative types (trees, understory shrubs, herbs, and non-woody macrophytes) are present on each bank. This parameter supplies information on the ability of the bank to resist erosion as well as some additional information on the uptake of nutrients by the plants, the control of instream scouring, and stream shading. Those stream banks with diverse vegetation types provide better erosion protection and provide more of a variety of allochthonous food material. Native vegetation scores higher than invasive or non-native vegetation.

### High and Low Gradient:

Habitat Parameter	Condition Category									
	Optimal		Suboptimal			Marginal			Poor	
Left/Right Bank	10	9	8	7	6	5	4	3	2	1 0
<b>9. Vegetative Protection</b>	More than 90% of the stream bank surfaces and immediate riparian zone covered by native vegetation, including trees, understory shrubs, or nonwoody macrophytes; vegetative disruption through grazing or mowing minimal or not evident; almost all plants allowed to grow naturally.		70-90% of the stream bank surfaces covered by native vegetation, but one class of plants is not well-represented; disruption evident but not affecting full plant growth potential to any great extent; more than one-half of the potential plant stubble height remaining.			50-70% of the stream bank surfaces covered by vegetation; disruption obvious; patches of bare soil or closely cropped vegetation common; less than one-half of the potential plant stubble height remaining.			Less than 50% of the stream bank surfaces covered by vegetation; disruption of stream bank vegetation is very high; vegetation has been removed to 5 centimeters or less in average stubble height.	
LB										
RB										



## 10 Riparian Vegetative Zone Width (High and Low Gradient Sheets)

This metric estimates the width of the natural vegetation from the edge of the stream bank through the riparian zone. A relatively undisturbed riparian zone supports a robust stream system; narrow riparian zones occur when roads, parking lots, fields, lawns, bare soil, rocks, or buildings are near the stream bank. Conversely, the presence of “old field” (i.e. a previously developed field not currently in use), paths, and walkways in an otherwise undisturbed riparian zone may be judged to be inconsequential to altering the riparian zone and may be given relatively high scores (however, the presence of these elements should be noted on the datasheet). When determining final scores, the age and density of the riparian vegetation should be evaluated. Each bank is scored independently from 10-0.

### High and Low Gradient:

Habitat Parameter	Condition Category									
	Optimal		Suboptimal			Marginal			Poor	
Left/Right Bank	10	9	8	7	6	5	4	3	2	1 0
<b>10. Riparian Vegetative Zone Width</b>	Width of riparian zone >18 meters; human activities (i.e., parking lots, roadbeds, clear-cuts, lawns, or crops) have not impacted zone.		Width of riparian zone 12-18 meters; human activities have impacted zone only minimally.			Width of riparian zone 6-12 meters; human activities have impacted zone a great deal.			Width of riparian zone <6 meters; little or no riparian vegetation due to human activities.	
LB										
RB										

### 8.2.17 General and Sediment Notes

If any element of the data collection needs further description, or is insufficient in describing onsite conditions, use this space to provide further details. Also, observations of elements not captured in standard data collection and general impressions of the conditions of the reach can be added.

Sediment notes should consider observations of sediment loading and substrate characteristics within the stream channel. Note extensive deposits of sediment or substrate within the stream, areas of obvious erosion or sources of sediment pollution in the area, or obvious scouring and substrate loss. Also note if there are extensive areas of exposed bedrock.

### 8.3 Habitat Scoring Criteria and Narrative Ratings

Reference reach habitat data collected from 1998 – 2005 were used to produce habitat criteria for each bioregion. The habitat assessment scores for reference reach stations in each bioregion were ranked and divided into percentiles. The 25<sup>th</sup> percentile was used to determine the cutoff for a narrative rating of “Good”. Scores falling within the 25<sup>th</sup> and 10<sup>th</sup> percentile were identified as the ranges for a narrative rating of “Fair”. Scores falling below the 10<sup>th</sup> percentile were assigned a rating of “Poor”. Due to inherent differences in the habitat structure of headwater (<5.0 mi<sup>2</sup>) and Wadeable (>5.0 mi<sup>2</sup>) streams in the Bluegrass Bioregion, separate

scoring criteria were developed for each. Scoring criteria and narrative ratings can be found in Table 2.

**Table 2.** Scoring for narrative habitat ratings.

Bioregion	Rating	Area Scoring	
		Headwater (<5.0 mi <sup>2</sup> )	Wadeable (>5.0 mi <sup>2</sup> )
Bluegrass (BG)	Good	≥ 156	≥ 130
	Fair	142 – 155	114-129
	Poor	≤ 141	≤ 113
Pennyroyal (PR)	Headwater or Wadeable		
	Good	≥ 146	
	Fair	132 – 145	
Mississippi Valley Interior River (MVIR)	Poor	≤ 131	
	Headwater or Wadeable		
	Good	≥ 135	
Mountain (MT)	Fair	114 – 134	
	Poor	≤ 113	
	Headwater or Wadeable		
Mountain (MT)	Good	≥ 160	
	Fair	117-159	
	Poor	≤ 116	

#### **8.4 Special Considerations for Assigning Ratings to Stations in a Bioregion Transition Area**

For stations that are in the MVIR-PR or PR-MVIR transition area, a low or high gradient determination must have been made using the guidance in Section 8.1.2 and the appropriate datasheet must have been used. If the stream was determined to be low gradient, the scoring criteria for the MVIR must be used to determine the narrative rating. If the stream was determined to be high gradient, the scoring criteria for the PR must be used to determine the narrative rating.

If the stream was determined to be high gradient and the station falls within the transition area of two high gradient bioregions (PR, MT, or BG), the scoring criteria may be evaluated for both the primary and secondary bioregion and multiple narrative ratings may be considered when making final decisions regarding the habitat quality.

#### **8.5 Photo Documentation**

At each biological/habitat station, photographs need to be taken of the sampling zone, upstream of the sampling zone, downstream of the sampling zone, and typical instream habitat for the station.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 27 of 33

Typical photos include:

- Upstream and downstream from top of reach
- Upstream and downstream from mid-reach
- Upstream and downstream from bottom of reach
- Typical left and right bank habitat
- Noted features (e.g. significant erosional areas of either bank)
- Substrate at head of riffles, in runs, in pools, and in riffles

## 9.0 DATA & RECORDS MANAGEMENT

---

All data collected shall be recorded on either a High or Low Gradient Habitat Assessment Datasheet. Datasheets shall undergo an initial data review for accuracy and completeness (see Section 11.0). Datasheets should be promptly scanned and filed in project folders. Data entry procedures should follow project guidance outlined in project QA documentation. Digital photos should be downloaded to project folders and named according to project QA guidance. All records, including hardcopy and electronic files, that are collected by DOW staff or that are collected for the explicit use by DOW must be kept according to KDEP record retention policy (KDLA, 2013).

## 10.0 QUALITY CONTROL & QUALITY ASSURANCE

---

Habitat assessment forms should be filled out by at least 2 trained field biologists who discuss and come to an agreement on each element of the form in order to control for individual bias.

Upon completion, each datasheet should be reviewed for completeness and accuracy. After this initial data review, the datasheet should be signed (or initialed) and dated in the appropriate location.

In addition, each year for each DOW program conducting habitat assessments, a randomly selected five percent of samples collected may be duplicated to evaluate precision and repeatability of the technique and the sampling crew. If possible, replicates will be collected by the same biologist(s) within the same index period. Results will be considered acceptable if the same narrative habitat assessment rating is attained. If the narrative habitat assessment rating is not the same between replicate samples, all biologists will meet to assess the issue and take corrective actions, which will be documented with other QA files.

For special studies, any deviation from the procedures in this document will be noted in study documentation approved by DOW biologists prior to sampling.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 28 of 33

## 11.0 REFERENCES

---

- Barbour, M.T., J. Gerritsen, B.D. Snyder, and J. B. Stribling. 1999. *Rapid bioassessment protocols for use in streams and Wadeable rivers: periphyton, benthic macroinvertebrates, and fish, second edition*. EPA 841-B-99-002. U.S. Environmental Protection Agency; Office of Water, Washington, D.C.
- Gordon, N.D., T.A. McMahon, and B.L. Finlayson. 1992. *Stream hydrology: an introduction for Great Lakes Sport Fish Advisory Task Force (GLSFATF)*. [1993]. Protocol for a uniform Great Lakes Sport Fish Consumption Advisory, September 1993 Draft. Great Lakes Sport Fish.
- Harrelson, C.C., C.L. Rawlins, and J.P. Potyondy. 1994. *Stream channel reference sites: An illustrated guide to field technique*. United States Department of Agriculture, Forest Service, Rocky Mountain Forest and Range Experiment Station, Fort Collins, CO. General Technical Report RM-245.
- Kentucky Department of Libraries and Archives (KDLA). 2013. *Department of Environmental Protection Records and Retention Schedule*. State Records Branch, Archives and Records Management Division, State Libraries, Archives, and Records Commission, Frankfort, Kentucky.
- Kentucky Division of Water (DOW). 2008. *Standard Methods for Assessing Biological Integrity of Surface Waters in Kentucky*. Kentucky Department for Environmental Protection, Division of Water, Frankfort, Kentucky.
- Kentucky Division of Water (DOW). 2025. *Worksite Hazard Assessment Guidance Document – Water Quality Branch*, DOWSOP03023, Version 4.0. Kentucky Department for Environmental Protection, Division of Water, Frankfort, Kentucky.
- Kentucky Division of Water (DOW). 2018. *In situ Water Quality Measurements and Meter Calibration*, DOWSOP03014, Version 2.0. Kentucky Department for Environmental Protection, Division of Water, Frankfort, Kentucky.
- Kentucky Division of Water (DOW). 2020. *Measuring Stream Discharge*, DOWSOP03019, Version 2.0. Kentucky Department for Environmental Protection, Division of Water, Frankfort, Kentucky.
- Kentucky Division of Water (DOW). 2025. *K-WADE Station Creation*, DOWSOP03038, Version 2.0, in draft. Kentucky Department for Environmental Protection, Division of Water, Frankfort, Kentucky.
- Rosgen, D. 1996. *Applied river morphology*. Printed Media Companies, Minneapolis, MN.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 29 of 33

Wolman, M.G. 1954. *A method of sampling coarse river-bed material*. Transactions of American Geophysical Union 35: 951-956.

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 30 of 33

## APPENDIX A. HIGH GRADIENT HABITAT ASSESSMENT DATASHEET

High Gradient Habitat Assessment Datasheet v3.1															Page 1		
Station Visit Information																	
Locale Name:		Project:		Trip:		County:											
Station ID:		Loc. Desc.:						Visit Date:									
Field Lead:		Primary Bioregion:				Secondary Bioregion:				Visit Start Time:							
Team:				Stream Perm.		Eph   Int   Per		Stream Type (HW or WA):				Visit Finish Time:					
STATION POINT VERIFICATION															WEATHER		
K-WADE Target Point		Field GPS Location		Nav. to Target Point Within GPS Error?		Target On Correct Stream?		Field GPS Error (m)		GPS Final		K-WADE Station Update		Scouring Rain In Last 14 Days		Y   N	
Lat:												Staff:				Now: Circle 1	
Long:				Y   N		Y   N						Date:				Past 24hr: HR   SR   IS CS   CO   SSH	
Stream Shading		Y   N		STREAM FLOW (Circle 1)		Dry   Pooled   Low Seasonal Normal Above Normal   Flood		INSTREAM FEATURES		Average Wetted Width (m):		# of riffles in reach					
General Shading (Circle 1)		Full   Partial   None						Maximum Depth (m):				# of runs in reach					
								Reach Length (m):				# of pools in reach					
LOCAL WATERSHED FEATURES (Major Land Use: Check all that are present)										CHANNEL ALTERATIONS- Full, Partial or Not/None							
Surface Mining				Construction				Pasture/Grazing				Dredging:		F   P   N		Channelization: F   P   N	
Deep Mining				Commercial				Silviculture									
Oil Wells				Industrial				Urban Runoff				Dom. Veg. Type:		Herbs   Grasses Shrubs   Trees		# of Strata:	
Land Disposal				Row Crops				Storm Sewers				Dom. Taxa:					
Residential				Forest				Permitted Outfalls									
HYDRAULIC STRUCTURES (Check all that are present)																	
Dams:				Bridge Abutments:				Fords:				Islands:				Waterfalls:	
																Berms:	
FIELD METER DATA																	
Temp (°C):				DO (mg/l):				DO %Sat:				pH (SU):				Sp. Cond (µS/cm):	
																Discharge CFS   Uncert.	
FIELD ACTIVITIES																	
Activity Completed?		Collectors		Collection Information (Check all that apply and/or enter/circle necessary information)													
Algae:				QualMHC:				Visual Form:				RAMULTI:				Other:	
Fish:				Equip:		BPEF   Seine   Barge		EF Seconds:				Seine Minutes:					
Habitat:				Habitat data other than RBP?													
Invertebrate:				1m <sup>2</sup> riffle + MH:				MACS 20-Jab:				Other:					
Multihabs Sampled Y/N or # Jabs		Undercuts/Roots:		Sticks/Wood:		Leaf Packs:		Water Willow:		Aufwuchs:		Supplemental:					
		Bedrock/Hardpan:		Silt/Sand/Fine Gravel:		Rock Pick:		Emergent Veg:		Wood Sample:							
Chemistry:				H <sub>2</sub> SO <sub>4</sub> Lot #:				HNO <sub>3</sub> Lot #:									
Multi-Probe:				Inst. ID:				Cal. Date:									
Discharge:				Inst. ID:				Beam Check:									
Other:				Other Desc:													
SUBSTRATE CHARACTERIZATION															Site Not Sampled (Reason) - Please Add Comments  Land Owner Denial Too Deep/Impounded Site Not Found Unsafe Dry Other (See Comments)		
Substrate Category		% Riffle:		% Run:		% Pool:		Reach Total									
Silt/Clay (<0.06 mm)																	
Sand (0.06 – 2 mm)																	
Gravel (2-64 mm)																	
Cobble (64 – 256 mm)																	
Boulders (>256 mm)																	
Bedrock/Hardpan Clay																	
Reach Location Description:												Weather Choices:		HR = Heavy Rain   SR = Steady Rain IS = Intermittent Showers   CS = Clear Sunny CO = Cloudy Overcast   SSH = Snow Sleet			
Initial Data Review By:						Initial Data Review Date:								Date Entered:			



Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 31 of 33

High Gradient Habitat Assessment Datasheet v3.1														Page 2																																									
Habitat Parameter	Condition Category																																																						
	Optimal					Suboptimal					Marginal			Poor																																									
SCORE	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																		
1. Epifaunal Substrate/ Available Cover	Greater than 70% of substrate favorable for epifaunal colonization and fish cover; mix of snags, submerged logs, undercut banks, cobble or other stable habitat and at stage to allow full colonization potential (i.e., logs/snags that are <u>not</u> new fall and <u>not</u> transient).					40-70% mix of stable habitat; well-suited for full colonization potential; adequate habitat for maintenance of populations; presence of additional substrate in the form of new fall, but not yet prepared for colonization (may rate at high end of scale).					20-40% mix of stable habitat; habitat availability less than desirable; substrate frequently disturbed or removed.					Less than 20% stable habitat; lack of habitat is obvious; substrate unstable or lacking.																																							
Score																																																							
2. Embeddedness	Gravel, cobble, boulder, and bedrock are 0-25% surrounded by fine sediment. Layering of cobble provides diversity of niche space					Gravel, cobble, boulder and bedrock are 25-50% surrounded by fine sediment.					Gravel, cobble, boulder, and bedrock are 50-75% surrounded by fine sediment.					Gravel, cobble, boulder, and bedrock are more than 75% surrounded by fine sediment.																																							
Score																																																							
3. Velocity/ Depth Regime	All four velocity/depth regimes present (slow-deep, slow-shallow, fast-deep, fast-shallow). (Slow is < 0.3 m/s, deep is > 0.5 m.)					Only 3 of the 4 regimes present (if fast-shallow is missing, score lower than if missing other regimes).					Only 2 of the 4 habitat regimes present (if fast-shallow or slow-shallow are missing, score low).					Dominated by 1 velocity/ depth regime (usually slow-deep).																																							
Score																																																							
4. Sediment Deposition	Little or no enlargement of islands or point bars and less than 5% (<20% for low-gradient streams) of the bottom affected by sediment deposition.					Some new increase in bar formation, mostly from gravel, sand or fine sediment; 5-30% (20-50% for low-gradient) of the bottom affected; slight deposition in pools.					Moderate deposition of new gravel, sand or fine sediment on old and new bars; 30-50% (50-80% for low-gradient) of the bottom affected; sediment deposits at obstructions, constrictions, and bends; moderate deposition of pools prevalent.					Heavy deposits of fine material, increased bar development; more than 50% (80% for low-gradient) of the bottom changing frequently; pools almost absent due to substantial sediment deposition.																																							
Score																																																							
5. Channel Flow Status	Water reaches base of both lower banks, and minimal amount of channel substrate is exposed.					Water fills >75% of the available channel; or <25% of channel substrate is exposed.					Water fills 25-75% of the available channel, and/or riffle substrates are mostly exposed.					Very little water in channel and mostly present as standing pools.																																							
Score																																																							
6. Channel Alteration	Channelization or dredging absent or minimal; stream with normal pattern.					Some channelization present, usually in areas of bridge abutments; evidence of past channelization, i.e., dredging, (greater than past 20 yr.) may be present, but recent channelization is not present.					Channelization may be extensive; embankments or shoring structures present on both banks; and 40 to 80% of stream reach channelized and disrupted.					Banks shored with gabion or cement; over 80% of the stream reach channelized and disrupted. Instream habitat greatly altered or removed entirely.																																							
Score																																																							
7. Frequency of Riffles (or bends)	Occurrence of riffles relatively frequent; ratio of distance between riffles divided by width of the stream <7:1 (generally 5 to 7); variety of habitat is key. In streams where riffles are continuous, placement of boulders or other large, natural obstruction is important.					Occurrence of riffles infrequent; distance between riffles divided by the width of the stream is between 7 to 15.					Occasional riffle or bend; bottom contours provide some habitat; distance between riffles divided by the width of the stream is between 15 to 25.					Generally all flat water or shallow riffles; poor habitat; distance between riffles divided by the width of the stream is a ratio of >25.																																							
Score																																																							
Left/Right Bank	10					9					8					7					6					5					4					3					2					1					0				
8. Bank Stability	Banks stable; evidence of erosion or bank failure absent or minimal; little potential for future problems. <5% of bank affected.					Moderately stable; infrequent, small areas of erosion mostly healed over. 5-30% of bank in reach has areas of erosion.					Moderately unstable; 30-60% of bank in reach has areas of erosion; high erosion potential during floods.					Unstable; many eroded areas; "raw" areas frequent along straight sections and bends; obvious bank sloughing; 60-100% of bank has erosional scars.																																							
LB																																																							
RB																																																							
9. Vegetative Protection	More than 90% of the streambank surfaces and immediate riparian zone covered by native vegetation, including trees, understory shrubs, or nonwoody macrophytes; vegetative disruption through grazing or mowing minimal or not evident; almost all plants allowed to grow naturally.					70-90% of the streambank surfaces covered by native vegetation, but one class of plants is not well-represented; disruption evident but not affecting full plant growth potential to any great extent; more than one-half of the potential plant stubble height remaining.					50-70% of the streambank surfaces covered by vegetation; disruption obvious; patches of bare soil or closely cropped vegetation common; less than one-half of the potential plant stubble height remaining.					Less than 50% of the streambank surfaces covered by vegetation; disruption of streambank vegetation is very high; vegetation has been removed to 5 centimeters or less in average stubble height.																																							
LB																																																							
RB																																																							
10. Riparian Vegetative Zone Width	Width of riparian zone >18 meters; human activities (i.e., parking lots, roadbeds, clear-cuts, lawns, or crops) have not impacted zone.					Width of riparian zone 12-18 meters; human activities have impacted zone only minimally.					Width of riparian zone 6-12 meters; human activities have impacted zone a great deal.					Width of riparian zone <6 meters; little or no riparian vegetation due to human activities.																																							
LB																																																							
RB																																																							
Total Score:																																																							
Notes/Comments:																																																							
General Notes:																																																							
Sediment Notes:																																																							

Document ID	DOWSOP03024
Version	3.1
Effective Date	March 2025
Page(s)	Page 32 of 33

## APPENDIX B. LOW GRADIENT HABITAT ASSESSMENT DATASHEET

Low Gradient Habitat Assessment Datasheet v3.1														Page 1	
Station Visit Information															
Locale Name:		Project:		Trip:		County:									
Station ID:		Loc. Desc.:						Visit Date:							
Field Lead:		Primary Bioregion:		Secondary Bioregion:				Visit Start Time:							
Team:				Stream Perm.		Eph   Int   Per		Stream Type (HW or WA):				Visit Finish Time:			
STATION POINT VERIFICATION															
K-WADE Target Point		Field GPS Location		Nav. to Target Point Within GPS Error?		Target On Correct Stream?		Field GPS Error (m)		GPS Final		K-WADE Station Update		Scouring Rain In Last 14 Days	
Lat:												Staff:		Now: Circle 1	
Long:				Y   N		Y   N						Date:		Past 24hr: HR   SR   IS CS   CO   SSH	
Stream Shading		Y   N		STREAM FLOW (Circle 1)		Dry   Pooled   Low Seasonal Normal Above Normal   Flood		INSTREAM FEATURES		Average Wetted Width (m):		# of riffles in reach			
General Shading (Circle 1)		Full   Partial   None						Maximum Depth (m):				# of runs in reach			
								Reach Length (m):				# of pools in reach			
LOCAL WATERSHED FEATURES (Major Land Use: Check all that are present)															
Surface Mining		Construction		Pasture/Grazing				Dredging:		F   P   N		Channelization:		F   P   N	
Deep Mining		Commercial		Silviculture											
Oil Wells		Industrial		Urban Runoff											
Land Disposal		Row Crops		Storm Sewers											
Residential		Forest		Permitted Outfalls											
CHANNEL ALTERATIONS- Full, Partial or Not/None															
RIPARIAN VEGETATION															
Dom. Veg. Type:		Herbs   Grasses Shrubs   Trees		# of Strata:											
Dom. Taxa:															
HYDRAULIC STRUCTURES (Check all that are present)															
Dams:		Bridge Abutments:		Fords:		Islands:		Waterfalls:				Berm:			
FIELD METER DATA															
Temp (°C):		DO (mg/l):		DO %Sat:		pH (SU):		Sp. Cond (µS/cm):		Discharge CFS   Uncert.					
FIELD ACTIVITIES															
Activity Completed?		Collectors		Collection Information (Check all that apply and/or enter/circle necessary information)											
Algae:				QualMHC:		Visual Form:		R4MULTI:		Other:					
Fish:				Equip:		BPEF   Seine   Barge		EF Seconds:		Seine Minutes:					
Habitat:				Habitat data other than RBP?											
Invertebrate:				1m <sup>2</sup> riffle + MH:		MACS 20-Jab:		Other:							
Multihabs Sampled Y/N or # Jabs		Undercuts/Roots: Bedrock/Hardpan:		Snags/Woody Debris: Cobble/Gravel:		Leaf Packs: Silt/Sand/Fine Gravel:		Emergent Veg: Wood Sample:		Supplemental:					
Chemistry:				H <sub>2</sub> SO <sub>4</sub> Lot #:				HNO <sub>3</sub> Lot #:							
Multi-Probe:				Inst. ID:				Cal. Date:							
Discharge:				Inst. ID:				Beam Check:							
Other:				Other Desc:											
SUBSTRATE CHARACTERIZATION															
Substrate Category		% Riffle:		% Run:		% Pool:		Reach Total							
Silt/Clay (<0.06 mm)															
Sand (0.06 – 2 mm)															
Gravel (2-64 mm)															
Cobble (64 – 256 mm)															
Boulders (>256 mm)															
Bedrock/Hardpan Clay															
Reach Location Description:								Weather Choices:		HR = Heavy Rain   SR = Steady Rain IS = Intermittent Showers   CS = Clear Sunny CO = Cloudy Overcast   SSH = Snow Sleet					
Initial Data Review By:				Initial Data Review Date:				Date Entered:							

Site Not Sampled (Reason) - Please Add Comments

Land Owner Denial  
Too Deep/Impounded  
Site Not Found  
Unsafe  
Dry  
Other (See Comments)



Document ID	DOWSOP03024
Version	3.0
Effective Date	January 2025
Page(s)	Page 33 of 33

Low Gradient Habitat Assessment Datasheet v3.1															Page 2						
Habitat Parameter	Condition Category																				
	Optimal					Suboptimal					Marginal				Poor						
SCORE	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
1. Epifaunal Substrate/ Available Cover	Greater than 50% of substrate favorable for epifaunal colonization and fish cover; mix of snags, submerged logs, undercut banks, cobble or other stable habitat and at stage to allow full colonization potential (i.e., logs/snags that are <u>not</u> new and transient).					30-50% mix of stable habitat; well-suited for full colonization potential; adequate habitat for maintenance of populations; presence of additional substrate in the form of new fall, but not yet prepared for colonization (may rate at high end of scale).					10-30% mix of stable habitat; habitat availability less than desirable; substrate frequently disturbed or removed.				Less than 10% stable habitat; lack of habitat is obvious; substrate unstable or lacking.						
Score																					
2. Pool Substrate Characterization	Mixture of substrate materials, with gravel and firm sand prevalent; root mats and submerged vegetation common.					Mixture of soft sand, mud, or clay; mud may be dominant; some root mats and submerged vegetation present.					All mud or clay or sand bottom; little or no root mat; no submerged vegetation.				Hard-pan clay or bedrock; no root mat or vegetation.						
Score																					
Pool Variability	Even mix of large-shallow, large-deep, small-shallow, small-deep pools present.					Majority of pools large-deep; very few shallow.					Shallow pools much more prevalent than deep pools.				Majority of pools small-shallow or pools absent.						
Score																					
4. Sediment Deposition	Little or no enlargement of islands or point bars and less than 20% of the bottom affected by sediment deposition.					Some new increase in bar formation, mostly from gravel, sand or fine sediment; 20-50% of the bottom affected; slight deposition in pools.					Moderate deposition of new gravel, sand or fine sediment on old and new bars; 50-80% of the bottom affected; sediment deposits at obstructions, constrictions, and bends; moderate deposition of pools prevalent.				Heavy deposits of fine material, increased bar development; 80% of the bottom changing frequently; pools almost absent due to substantial sediment deposition.						
Score																					
5. Channel Flow Status	Water reaches base of both lower banks, and minimal amount of channel substrate is exposed.					Water fills >75% of the available channel; or <25% of channel substrate is exposed.					Water fills 25-75% of the available channel, and/or riffle substrates are mostly exposed.				Very little water in channel and mostly present as standing pools.						
Score																					
6. Channel Alteration	Channelization or dredging absent or minimal; stream with normal pattern.					Some channelization present, usually in areas of bridge abutments; evidence of past channelization, i.e., dredging, (greater than past 20 yr.) may be present, but recent channelization is not present.					Channelization may be extensive; embankments or shoring structures present on both banks; and 40 to 80% of stream reach channelized and disrupted.				Banks shored with gabion or cement; over 80% of the stream reach channelized and disrupted. Instream habitat greatly altered or removed entirely.						
Score																					
7. Channel Sinuosity	The bends in the stream increase the stream length 3 to 4 times longer than if it was in a straight line. (Note - channel braiding is considered normal in coastal plains and other low-lying areas. This parameter is not easily rated in these areas.					The bends in the stream increase the stream length 2 to 3 times longer than if it was in a straight line					The bends in the stream increase the stream length 2 to 1 times longer than if it was in a straight line.				Channel straight; waterway has been channelized for a long distance.						
Score																					
Left/Right Bank	10 9					8 7 6					5 4 3				2 1 0						
8. Bank Stability	Banks stable; evidence of erosion or bank failure absent or minimal; little potential for future problems. <5% of bank affected.					Moderately stable; infrequent, small areas of erosion mostly healed over. 5-30% of bank in reach has areas of erosion.					Moderately unstable; 30-60% of bank in reach has areas of erosion; high erosion potential during floods.				Unstable; many eroded areas; "raw" areas frequent along straight sections and bends; obvious bank sloughing; 60-100% of bank has erosional scars.						
LB																					
RB																					
9. Vegetative Protection	More than 90% of the streambank surfaces and immediate riparian zone covered by native vegetation, including trees, understory shrubs, or nonwoody macrophytes; vegetative disruption through grazing or mowing minimal or not evident; almost all plants allowed to grow naturally.					70-90% of the streambank surfaces covered by native vegetation, but one class of plants is not well-represented; disruption evident but not affecting full plant growth potential to any great extent; more than one-half of the potential plant stubble height remaining.					50-70% of the streambank surfaces covered by vegetation; disruption obvious; patches of bare soil or closely cropped vegetation common; less than one-half of the potential plant stubble height remaining.				Less than 50% of the streambank surfaces covered by vegetation; disruption of streambank vegetation is very high; vegetation has been removed to 5 centimeters or less in average stubble height.						
LB																					
RB																					
10. Riparian Vegetative Zone Width	Width of riparian zone >18 meters; human activities (i.e., parking lots, roadbeds, clear-cuts, lawns, or crops) have not impacted zone.					Width of riparian zone 12-18 meters; human activities have impacted zone only minimally.					Width of riparian zone 6-12 meters; human activities have impacted zone a great deal.				Width of riparian zone <6 meters; little or no riparian vegetation due to human activities.						
LB																					
RB																					
Total Score:	<div style="border: 1px solid black; width: 150px; height: 20px; margin-bottom: 5px;"></div> <div style="border: 1px solid black; width: 150px; height: 20px;"></div>																				
Notes/Comments:																					
General Notes:																					
Sediment Notes:																					